

**Fast-setting, high-strength flowing grout**

# webertec grout FG



## About this product

**webertec grout FG** is a three-component polyester grout for anchoring and fixing. Fast-setting for rapid installation and can be used down to 0°C. Flowing grout to fill gaps of between 5mm up to 90mm dependent upon bulking out with aggregate.

## Technical data

### AC150/5370-10 P606 Test results

Performance Characteristic	Method	Requirement	Result	
Tensile strength	ASTM D-638-09	1000 psi	2639 psi	18.19 MPa
Elongation	ASTM D-638-09	≥20%	0.98%	
Dielectric strength (short time test)	ASTM D-149-97a	350 Volts/Mil	360 Volts/Mil	
Arc resistance	ASTM D-495-14	125 seconds	185 seconds	
Adhesion to steel	FAA Item P-606-3.5	1000 psi	1483 psi	10.22 MPa
Adhesion to cement concrete	FAA Item P-606-3.6	200 psi	639 psi	4.4 MPa
Compatibility with asphalt concrete	ASTM D-5329-16	Yes / No	Compatible	
Adhesion to aluminium	ASTM D-4541	250 psi	770 psi	5.3 MPa

### Pot life or cure time

Temperature	Standard grade	Rapid grade
0°C	–	40 minutes
5°C	–	25 minutes
7°C	Do not use below 10°C	22 minutes
10°C	55 minutes	17 minutes
15°C	45 minutes	12 minutes
20°C	30 minutes	Do not use above 17°C
25°C	20 minutes	–
30°C	15 minutes	–
35°C	12 minutes	–
40°C	8 minutes	–

## Uses

- Fixing airport lighting units
- Fixing vertical bolts, starter bars and dowels
- Grouting anchor bolts and holding down bolts

## Features and benefits

- ▲ Fast-setting with rapid strength gain, allowing loads to be applied within 2 hours at 20°C
- ▲ Available in standard and rapid grades depending upon temperature
- ▲ Excellent adhesion to concrete and asphalt substrates
- ▲ Can be bulked out for varying gap sizes, 5 mm – 90 mm
- ▲ Proven technology with reliability
- ▲ Over 30 years experience worldwide

# webertec grout FG

## Preparation

It is essential that all surfaces are clean, sound and dry. Inadequate preparation is likely to lead to a failure of bond.

Concrete surfaces should be prepared by suitable mechanical method to provide a clean, freshly-exposed concrete surface. Drill holes with a rotary percussive drill to provide a rough side to the drilled hole suitable for anchorage.

New concrete must be 28 days old and free of any cement laitance.

Steel surfaces should be free of any surface rust and grit blasted. Degrease with **webertec solvent**.

Asphalt surfaces should be clean, sound and dry. Ensure any cut surfaces are washed to remove any slurry or dirt.

## Application

**webertec grout FG** must be placed immediately after mixing, due to the rapid set of the grout.

Setting times are dependent on temperature and these are shown in the Technical Data on the facing page.

Ensure there are no voids or entrapped air in the gap.

It is recommended that in hot weather, the product is kept as cool as possible.

## Yield

Yield is dependent upon bulking out – see *Mixing*.

## Storage and shelf life

Store in a cool, dry place.


Shelf life of unopened packs is at least 12 months.

For hot weather conditions, it is recommended that **webertec grout FG** is kept cool in a refrigerated container and in insulated boxes on site. This will ensure a longer working time.

## Packaging

**webertec grout FG** is supplied in 23.3kg packs.

## Mixing

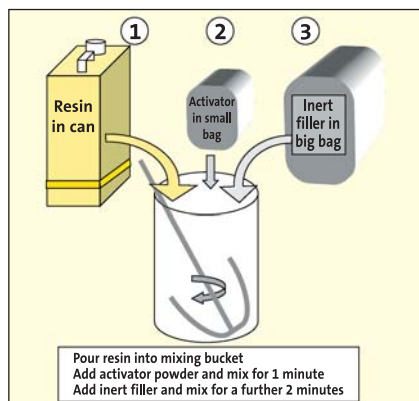

Small quantities can be mixed by hand using a spatula, flat stick etc. Larger quantities should be mixed using a mechanical stirrer or electric drill attachment, such as an MR4-100 blade at a speed below 450 rpm.

**webertec grout FG** when mixed is used for annular gaps of between 5 mm and 12 mm. For larger gaps, **webertec grout FG** can be bulked out as follows:

Gap size	Materials	Yield
5 – 12mm	<b>webertec grout FG</b>	12 litres
12 – 25mm	Up to 20kg oven dried 8 – 16 grade sand per pack grout	20 litres
20 – 40mm	Up to 27kg of aggregate single size 5 – 6mm per pack grout	22 litres
30 – 90mm	15kg of aggregate, single size 10mm per pack of grout	18 litres

Pour the resin into a clean plastic or other suitable container and gradually add the small bag containing hardener. Mix thoroughly. Now add the large bag containing filler and mix until a uniform colour and consistency is achieved.

**NB:** do not use site sand or aggregates. All aggregates must be oven-dried.

## Technical services

**Weber's** Customer Services Department has a team of experienced advisors available to provide on-site advice both at the specification stage and during application. Detailed specifications can be provided for specific projects or more general works. Site visits and on-site demonstrations can be arranged on request.

### Technical helpline

Tel: 01525 718877 Option 2  
e-mail [technical@netweber.co.uk](mailto:technical@netweber.co.uk)

## Sales enquiries

**Weber** products are distributed throughout the UK through selected stockists and distributors. Please contact the relevant Customer Services Team below for all product orders and enquiries.

### UK and Ireland

Tel: 01525 718877  
Fax: 0800 014 2995  
e-mail [customerservice@netweber.co.uk](mailto:customerservice@netweber.co.uk)

### Saint-Gobain Weber

Dickens House, Enterprise Way, Maulden Road, Flitwick, Bedford MK45 5BY, UK  
Tel: 01525 718877 Fax: 0800 014 2995 e-mail: [mail@netweber.co.uk](mailto:mail@netweber.co.uk)  
[www.uk.weber](http://www.uk.weber)

To the best of our knowledge and belief, this information is true and accurate, but as conditions of use and any labour involved are beyond our control, the end user must satisfy himself by prior testing that the product is suitable for his specific application, and no responsibility can be accepted, or any warranty given by our Representatives, Agents or Distributors. Products are sold subject to our Standard Conditions of Sale and the end user should ensure that he has consulted our latest literature.